



Solar Inground Light 太阳能地埋灯

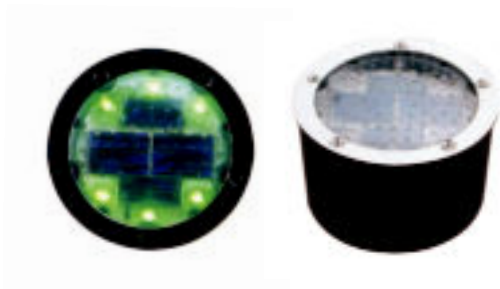

MSL-G95

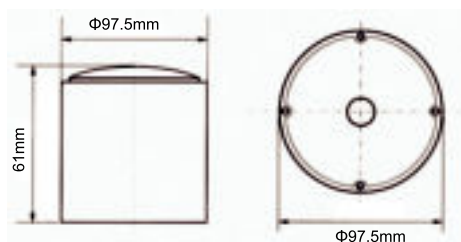

S1-19

Solar Brick &
Inground Light
(MSL-G)




MSL-G95R

Item No.: MSL-G95,MSL-G95R

- Material of light: Super light-permeability polycarbonate (PC) with stainless steel ring and aluminium body
- Solar cell: Crystalline silicon 2.0V/160mA(with battery), 2.5V/130mA (with capacitor)
- Storage component: Ni-MH HT AAA 1.2V/1200mAh battery or 2.3V/360F super capacitor
- Light source: 6pcs of super bright LEDs
- Color of light: Red, green, blue, white, yellow
- Light mode: Constant type
- Work Temperature: -25 to +80 °C
- Work Time: Over 12 hrs after 1 sunny day charge, 3 nights continuously if battery fully charged
- Visible distance: More than 800m
- Hardware fittings: Metal mounting case for optional
- IP rate: IP67
- Product size: Φ 97.5x61mm N.w.: 0.80kg
- Life time: Over 3 years (fitted with Ni-Mh battery)
Over 8 years (fitted with super capacitor)

型号: MSL-G95, MSL-G95R

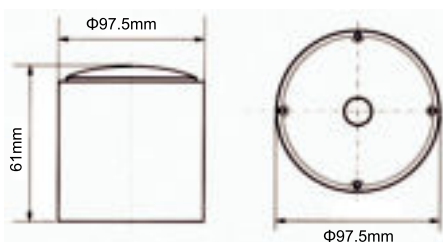

- 灯体材质: 高透明性聚碳酸酯(PC), 不锈钢圈与铸铝件外壳
- 太阳能板: 晶体硅 2.0V/160mA(配电池); 2.5V/130mA(配电容)
- 储能元件: Ni-MH AAA 1.2V/1200mAh (耐高温电池) 或者2.3V/360F 超级电容
- 光源: 6pcs超高亮度 LEDs
- 发光颜色: 红、绿、蓝、白、黄(可任一选择)
- 发光模式: 恒亮
- 工作温度: -25 ~ +80 °C
- 工作时间: 正常晴天状态下每晚连续工作12小时以上 电池充饱电时可连续供电3晚
- 可视距离: 大于 800m
- 五金配件: 不锈钢面板及铸铝预埋件(供选购)
- 防护等级: IP67
- 产品尺寸: Φ 97.5x61mm 净重: 0.80kg
- 使用寿命: 平均寿命3年(配Ni-MH电池)
平均寿命8年(配超级电容)