


Solar Baluster Lamp(Easy Road)

太阳能护栏指示标

S2-1

Solar Road Stud (MSL-R)

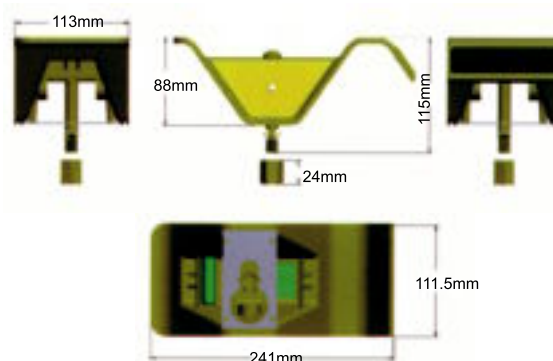


Item No.: MSL-R22

- Material of light: Reinforced plastic and PC
- Solar cell: Crystalline silicon 2.5V/160mA
- Storage component: Ni-MH AA battery 1.2V/1200mAh or super capacitor 2.3V/220F
- Light source: 1pc(single side) or 2pcs(dual sides) of super bright LEDs
- Color of light: Red, green, blue, white, yellow
- Light mode: Flash type or constant type
- Work Temperature: -25 to +75 °C
- Work Time: Over 12 hrs after 1 sunny day charge, 3 nights contineously if battery fully charged
- Visible distance: More than 800m
- IP rate: IP67
- Product size: 241x111.5mm N.w.: 0.30kg
- Life time: Over 3 years (fitted with Ni-Mh battery) Over 8 years (fitted with super capacitor)
- Applications: 1. Speedway fence 2.A/B road fence 3.Village byway fence 4.Corner road 5. Vehicle diffluence place 6. Any caution necessary places.

型号: MSL-R22

- 灯体材质: 高韧性工程级塑料和PC
- 太阳能板: 晶体硅2.5V/160mA
- 储能元件: Ni-MH AA 电池1.2V/1200mAh 或者超级电容2.3V/220F
- 光源: 1pc(单边)或者2pcs(双边)超高亮度 LEDs
- 发光颜色: 红、绿、蓝、白、黄(可任一选择)
- 发光模式: 闪烁或者恒亮
- 工作温度: -25 ~ +75 °C
- 工作时间: 正常晴天状态下每晚连续工作12小时以上 电池充电时可连续供电3晚
- 可视距离: 大于 800m
- 防护等级: IP67
- 产品尺寸: 241x111.5mm 净重: 0.30kg
- 使用寿命: 平均寿命3年(配Ni-MH电池) 平均寿命8年(配超级电容)
- 使用场合: 1.高速公路护栏; 2.一级公路公路护栏; 3.乡间小道护栏; 4.多雾地带公路护栏; 5.盘山公路护栏; 6.车辆分流处; 7.铁路匝道口; 8.收费站车道线上; 9.事故多发地段等等

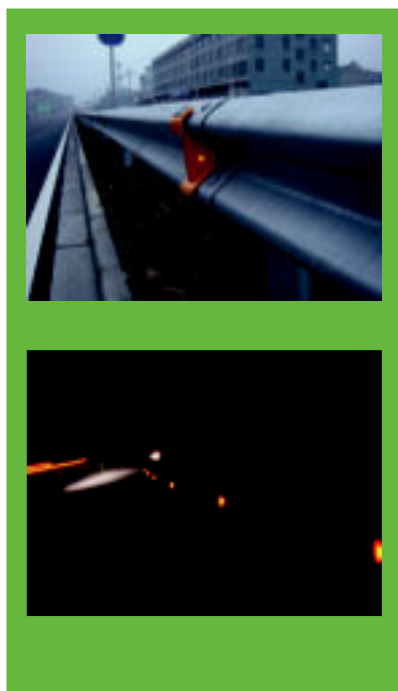

MORSTAR
ELECTRIC TECHNOLOGY